




infraprotect

The infrared-protected barrier film

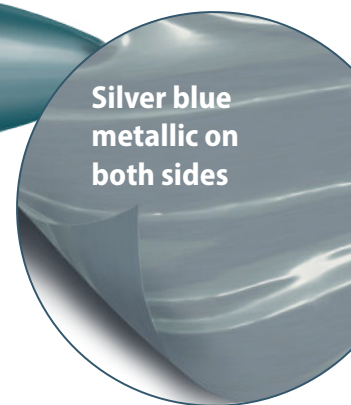

Silver blue metallic on both sides

- ✓ EVOH barrier layer for maximum oxygen barrier
- ✓ Metallic glossy surface reduces the heat effect on the silage
- ✓ 7 layers
- ✓ Regenerate-free – pure raw materials without used plastics
- ✓ With metallocenes for unique tensile and tear strength
- ✓ 18 months UV-stable
- ✓ 110 µm thick: Ideal film thickness for safe handling in the silo

Very high reflective power even in the infrared radiation range, resulting in

- Significantly better deflection of heat radiation
- Less heating of the silage

Available sizes:

50 m length with 8 / 10 / 12 / 14 / 16 / 18 / 20 m width

300 m length with 12 / 14 / 16 / 18 / 20 / 22 m width

Other sizes on request

